


CTS PLEATED POLYESTER CARTRIDGES



The CTS pleated polyester washable cartridge is designed to protect boilers, dishwashers and washing machines by filtering sand, scale, rust. Versatile industrial use includes varnish and coating filtration, industrial applications, chemical, petrochemical, food and drinks, pharmaceutical, cosmetics, electronics, biotech, nuclear.

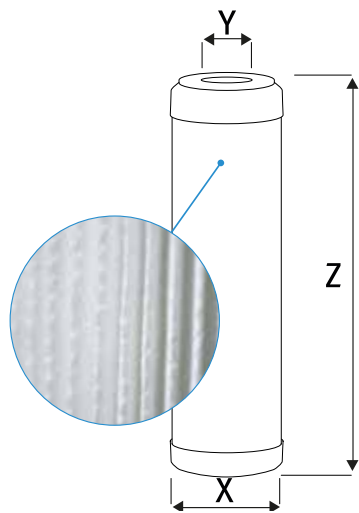

KEY FEATURES

- 3 times higher filtering area in comparison to standard cartridges
- Easy to wash under running water
- High pressure resistance thanks to the filter structure
- Suitable for drinking water treatment
- Complies with DM25 standards (ITALY)

made in 
ITALY



Model	CTS
Filtration	Polyester
Filtering medium	Polypropylene
Inter core	Polypropylene
Valves	Polypropylene
Gasket	Elastomer
Connection	DOE
Working temperature	From 4°C (39°F) to 45°C (113°F)
Cartridge type	Washable
Maintenance	Quarterly
Duration	24 months

Code	Size	Filtration rating, µ	Flow rate, l/h	Z	X	Y	Pieces in box
FCSTPD0015	9" ¾	50	2 200	24.8 cm	7.0 cm	2.8 cm	24